



- \* Sports goods.
- \* Advertising, flags, banners, accessories.
- \* Large photos, posters.

- \* Transfer on Hard Substrate (ceramic, aluminium, plastic, wood...)
- \* Textile : home finishing, apparel, curtains...
- \* Awning

- Ideal for sublimation with good productivity and flexibility.
- Fast startup ! (15 to 20min)
- Plate in rectified high quality aluminium
- Perfect heat distribution
- PT100 platinum heat sensor
- 2-year guarantee on the machine.
- 10-year guarantee on heating elements
- Manufactured in France.



Set programs



Pneumatic



Fast heat up



Pre-heat time



Touch Screen

## OPTIONAL ACCESSORIES



Sublimation paper



Polyester Felt



Nomex® Cover



Teflon Cover



Support Table with or without castors



Compressor

## TECHNICAL CHARACTERISTICS

|                              |                                                                 |
|------------------------------|-----------------------------------------------------------------|
| Type<br>Operation            | Pneumatic<br>SLIDE - Tray with drawer                           |
| Platen size                  | SLIDE865 : 850x650 mm<br>SLIDE1285 : 1250x850 mm                |
| Weight                       | SLIDE865 : 261 Kg / 575 lbs<br>SLIDE1285 : 419 Kg / 924 lbs     |
| Max thickness<br>°C / °F Max | 45 mm<br>220 °C / 429 °F                                        |
| Power                        | SLIDE865 : 6000 W<br>SLIDE1285 : 12000 w                        |
| Power supply                 | SLIDE865 : 240V Single phase<br>SLIDE1285 : 400 V 3-phases      |
| Amperage                     | SLIDE865 : 28 A<br>SLIDE1285 : 18 A                             |
| Applications                 | ChromaLuxe, Sublimation Rigid<br>Substrate, Textile Sublimation |

## SETTINGS



Touch electronics developed by Sefa  
Precise and fast regulation (PID control)  
4 recordable programs  
Counter with reset  
Double timer  
Energy saving

From 0 to 570 sec (precision +/- 1%).  
From 0 to 220°C (precision +/- 1%).

Heating time to reach 180°C : 10 min.

## OPTIONAL ACCESSORIES



**TAB-98 / R**  
Support table. With or without castors.



**COMP-111**  
Silent compressor 42dB(a)  
50L. 111Lt/min.



**FEU-P865 / FEU-P1285**  
Polyester felt for lower plate.



**TOI-T865 / TOI-T1285**  
Teflon cover for heating plate.




**TOI-N865/TOI-N1285**  
Nomex® cover for heating plate.





**SE64300 / SE44100**  
High quality sublimation paper available in 44"x30m and 64"x100m.

## DIMENSIONS

### SLIDE 865

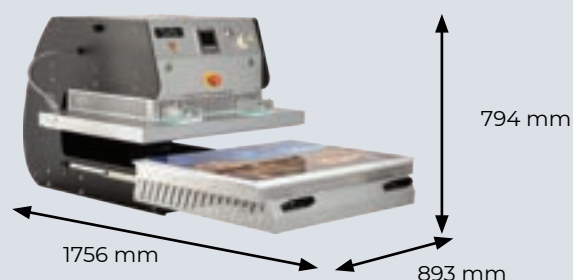

### SLIDE 1285

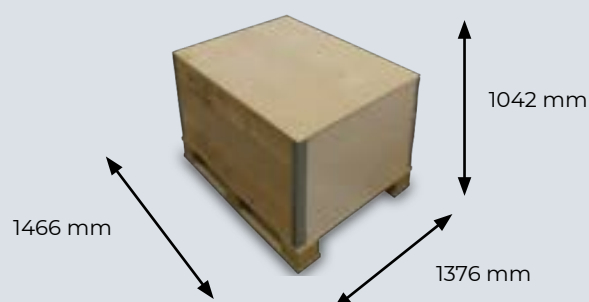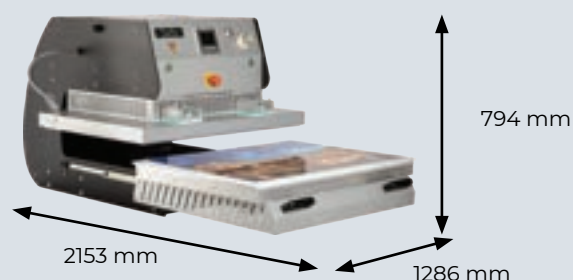

Box weight CAI-SLIDE : 75 kg